

FLUID HANDLING:

Tote Adapter Kit

Easily connect your tote to your filtration system while keeping your lubricants and equipment clean and dry.



The Overview

The Tote Adapter Kit: The Key Benefits


- Allows for easy equipment adaptation and quick connection to a filtration system
- Prohibits entry of dirt and moisture
- Allows for customization

What Are All the Features?*

- Replaceable breather with color-indicating desiccant
- Quick connect plugs
- 2" male NPT connection size
- Sample valve
- 6" fill tube
- Customizable colors

*Don't see the options you need? Contact our Technical Support team at (615) 672-8800 or sales@descase.com.

Which Part Is Which?

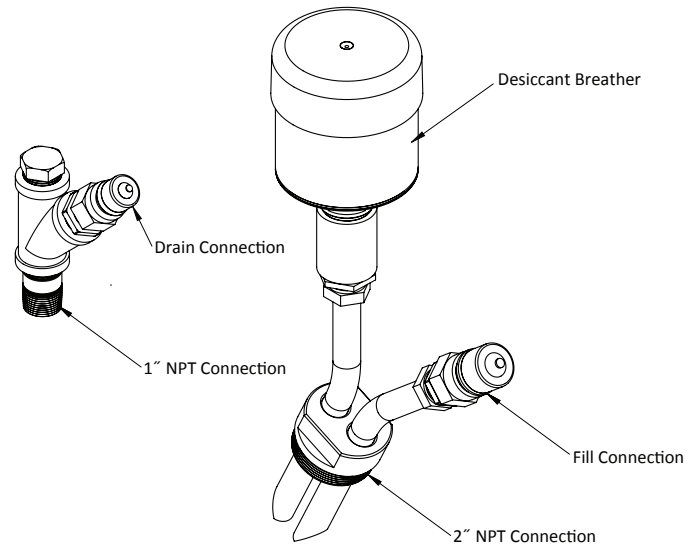

Did You Know?

Pairing fluid handling filtration with breather protection, via a Des-Case adapter kit, allows for maximum system integrity—requiring less equipment and labor while reducing system contamination.

Try the Entire Selection of Des-Case Adapter Kits



TO ORDER:

Tote Adapter Kit

TA						
	Box 1	Box 2	Box 3	Box 4	Box 5	Box 6

Drain & Fill Connector Type [Box 1]

Code	Description
B	ISO B Connector
A	ISO A Connector
F	Flush Face Connector
R	ISO B Connector-BSPP
Q	ISO A Connector-BSPP
P	Flush Face Connector-BSPP

NOTE: All connectors are plug ends (male)

Sample Valve [Box 3]

Code	Description
0	None
1	Standard Minimes
2	High Viscosity

Sample Tube Length [Box 4]

Code	Description
	Enter 2 digits (e.g. 08 for 8 inches) ranging from 06-35"

NOTE: Enter 00 for no sample tube. A selection must be made if sample valve is needed

Custom Colors [Box 6]

Code	Description
1	Brushed Aluminum
2*	Black
3	White
4	Blue
5	Red
6	Yellow

*Black is standard

Drain & Fill Sizing [Box 2]

Code	Description
1	Drain: 1" connection Fill: ¾" connection
2	Drain: ¾" connection Fill: ½" connection

NOTE: Units are built for optimum performance when using 1" (drain) and ¾" (fill) connections. Decrease in performance may occur when selecting other size combinations.

Breather Filter[†] [Box 5]

Code	Description
02*	3-micron particulate desiccant breather; 0-200 gallons; 120gpm [DC-2]
03	3-micron particulate desiccant breather; 201-350 gallons; 120gpm [DC-3]
04	3-micron particulate desiccant breather; 351-500 gallons; 120gpm [DC-4]

*Standard for tote adapters

NOTE: For breather replacement, use bracketed part number.

[†]Considerations such as humidity level, frequency, and maximum amount of air flow, ambient temperatures, gallons of lubricant, and chemical compatibility are very important in sizing a desiccant breather properly. Call Des-Case for assistance in sizing the appropriate breather for your application.



FLUID HANDLING:

The Entire Des-Case Line

We offer a full range of fluid handling and filtration products in Portable Filtration, Dedicated Filtration, Water Removal, Lubricant Storage & Filtration, Filter Elements, and Adapter Kits to suit your needs.

**Customize your system today at
www.descase.com.**